


Table 4-4. Swivel Arm Assembly Parts List

Item Number	Part Number	Description
(Figure 4-4)	4-018299-00	Swivel arm assembly
1	4-018775-00	Bottom plate (rear switch version)*
	---	Bottom plate (for display with no external switch: not a field-replaceable unit)*
2	4-018254-00	Spring assembly (rear switch version)*
	4-018298-00	Spring assembly (no external switch)*
3	4-005875-00	Screw, knurled, 10-32 by 1, zinc-plated*
4	4-006482-00	Lockwasher, split-ring, #10, zinc-plated*
5	4-005698-00	Screw, knurled, 8-32 by 1/4, zinc-plated*
6	4-006327-00	Lockwasher, split-ring, #8, zinc-plated*
7	4-011563-00	Bumper handle*
8	4-019333-00	Knob
9	4-019486-00	Sleeve
10	4-019339-00	Washer, flat, 5/8, stainless steel
11	4-001886-00	Retaining ring, 0.579 ID

\* Not included in swivel arm assembly

**NOTE**  
The swivel arm assembly (4-018299-00) includes these parts: knob (4-019333-00), sleeve (4-019486-00), washer (4-019339-00), retaining ring (4-001886-00), and swivel arm. The swivel arm alone is not available separately.

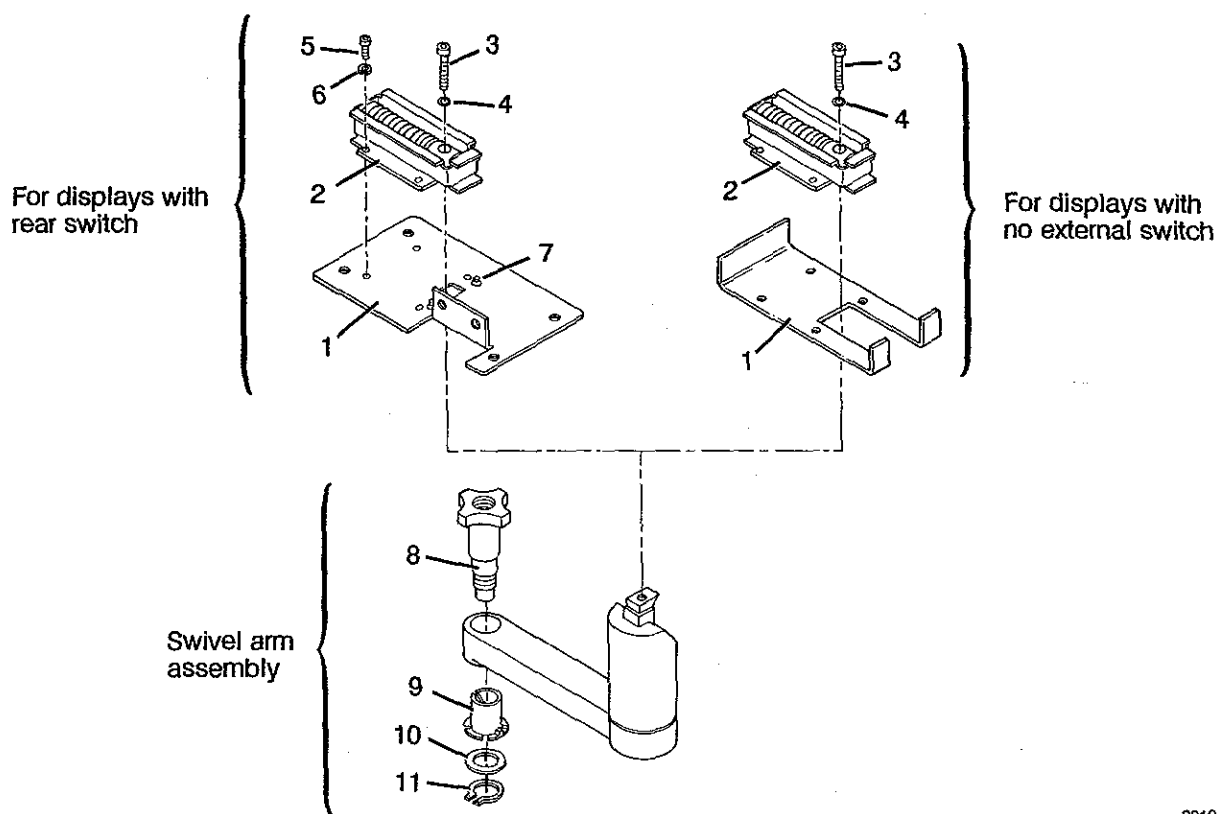

22107-014B

Figure 4-4. Swivel Arm Assembly

## 7202 Kits

The following kits are available to upgrade the 7202 Display or enhance its capabilities. If any kit is ordered as a field upgrade to an existing ventilator, installation will be performed by a Puritan-Bennett service engineer in the hospital. Installation is included in the quoted price of the kit, excluding a zone travel charge which must be quoted individually.

- 4-025106-00    **7200a Interface Kit.** Prepares 7200a Ventilators to operate with the 7202 Display or DCI option; not required for 7200ae Ventilators. Includes internal ventilator cables and D-connectors.
- 4-017180-00    **7202 Compatibility Kit.** Upgrades 7202 Displays already in use to accept the 7200ae Graphics option (Option 60). Not required for displays shipped after January 1991. Includes a revised display cable and software EPROM.
- 4-018253-00    **7202 Upgrade Kit.** Upgrades 7202 Displays already in use to accept the 7200ae Graphics option (Option 60), and to includes redesigned housing (converts existing displays to equivalent of displays shipped after January 1991). Includes redesigned front and rear housings, display cables, and software EPROM.